



# Spectrum Single-Mode beam from LD/PMF Unit AOS108EX


532nm

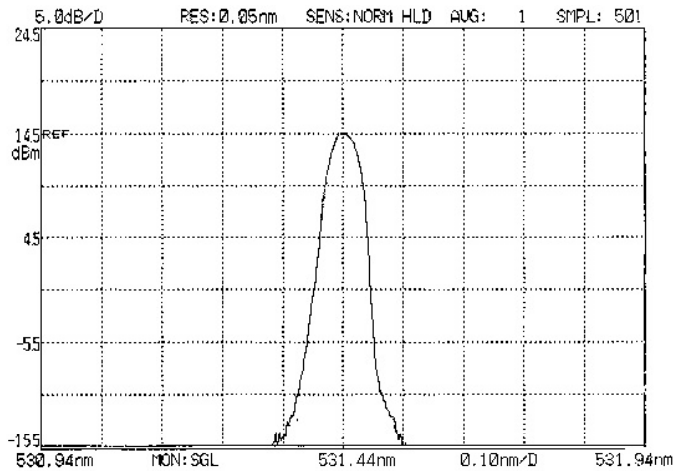


640nm

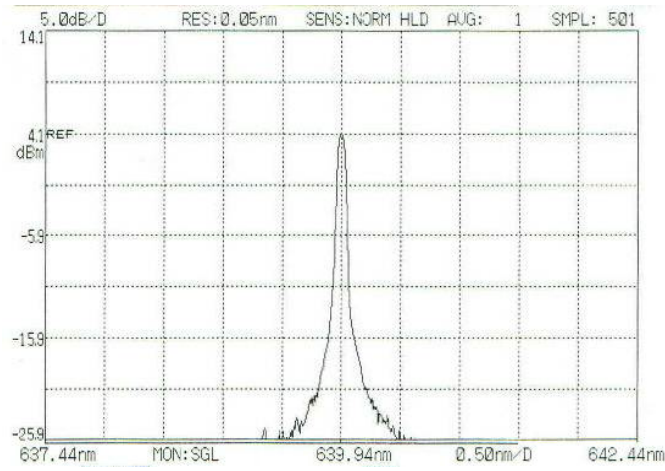


658nm

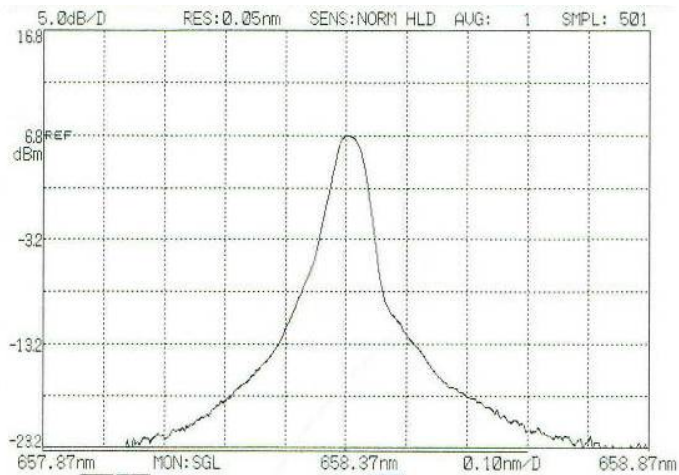

782nm

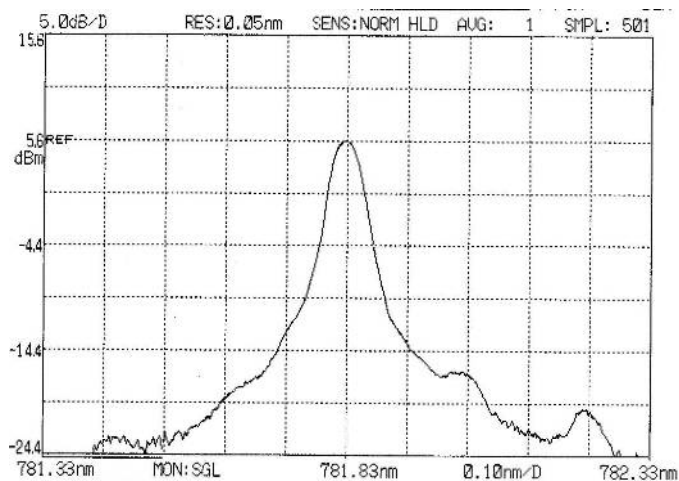

850nm

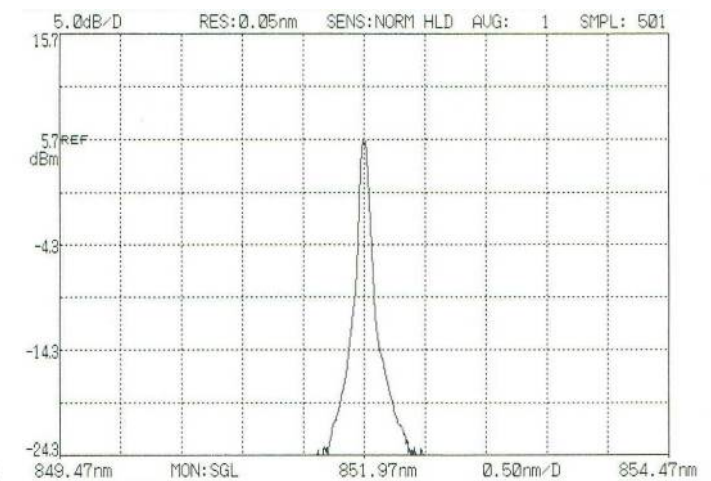

Connector's edge is an angled pherrule.

These are assembled without isolators with long years experiences.

ORSA is always challenging original technique with craftsmanship.

LD : 405nm, 445nm, 470nm, 515nm, 530nm, 635nm, 640nm, 658nm, 782nm, 830nm, 850nm, 1300nm, 1550nm

Fiber : PMF ( Polarizing Maintaining Fiber ) Efficacy : 40~50% around Extinction ratio : 20dB aro. or more