

Super Stabilized Power LD/Fiber Unit Temp. Controlled model:AOS308

Model Example:AOS308-850nm-10nm-PMF

Temperature Controlled by Pertier device




Standard Fiber	PMF 1.5m (SM&MM are also possible.
Supply Power	12V 4A or 5A AC-Adaptor
Size	230 x230 x 70 (mm)
Efficiency	40%~50% (70% in case of GI)
Stability	± 0.003dBr/5min. or longer


AOS408=Double LD modules in one Unit

Ours are not of Catalog Spec. We always show measured Data.

5mW
5 min.
mW
indicate

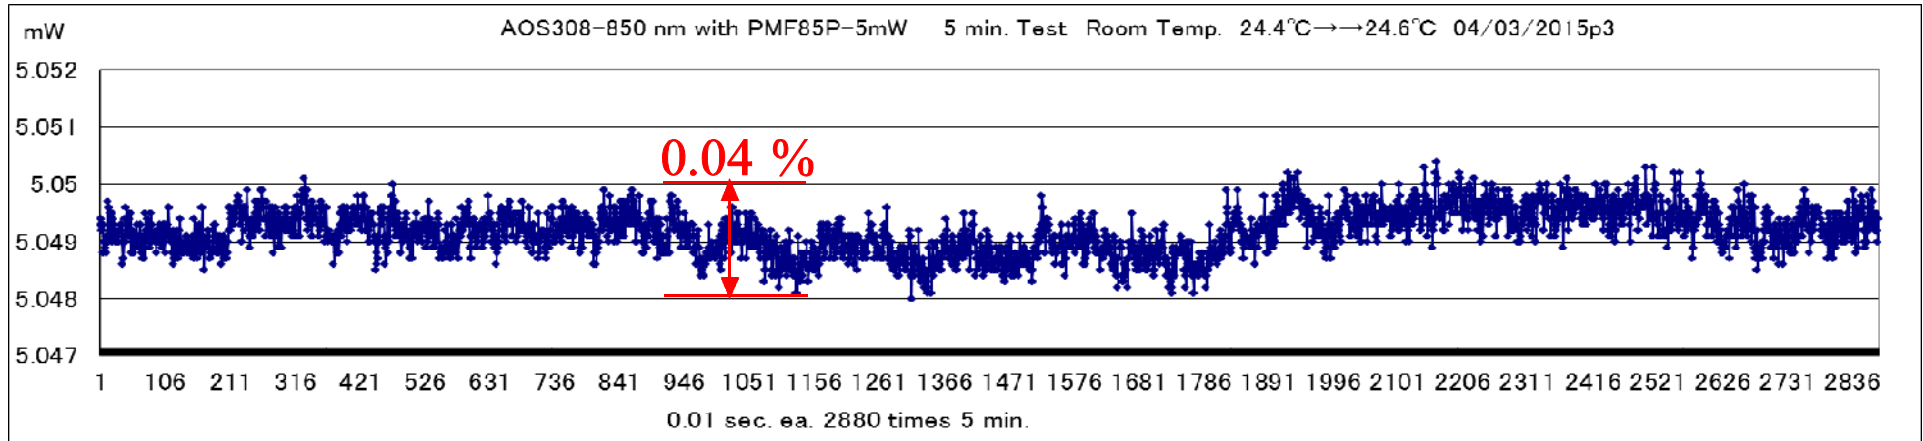


10mW
5 min.
dBr
indicate

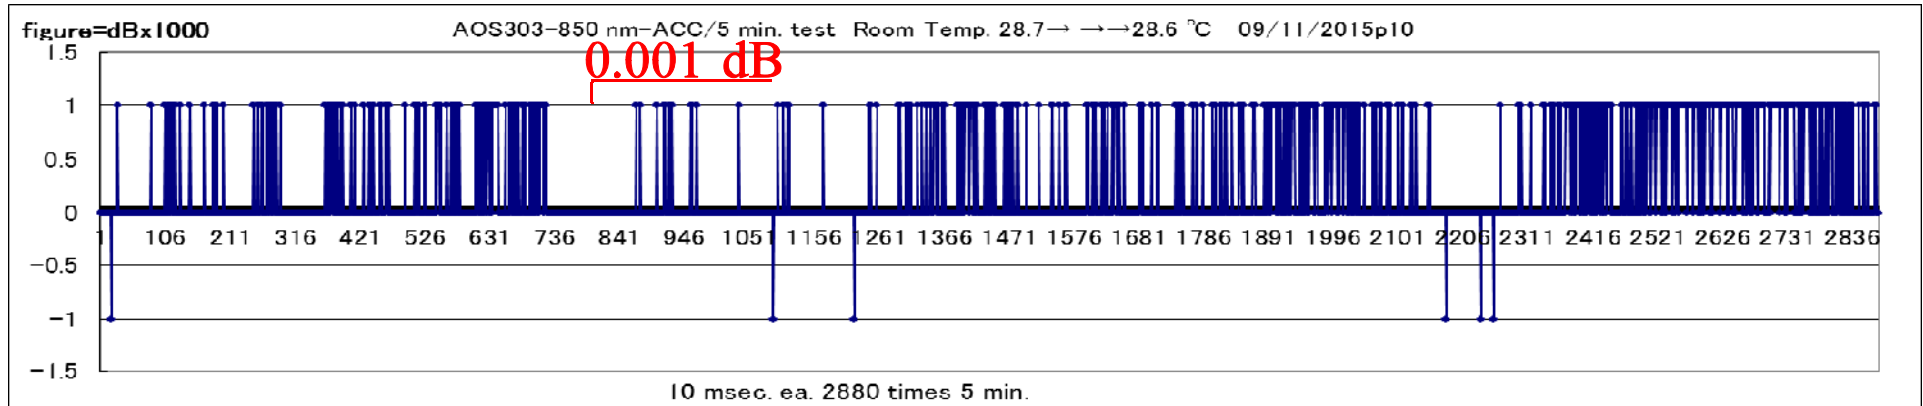


AOS308-850nm-10mW-GI Stability Test additional Data

50 min.

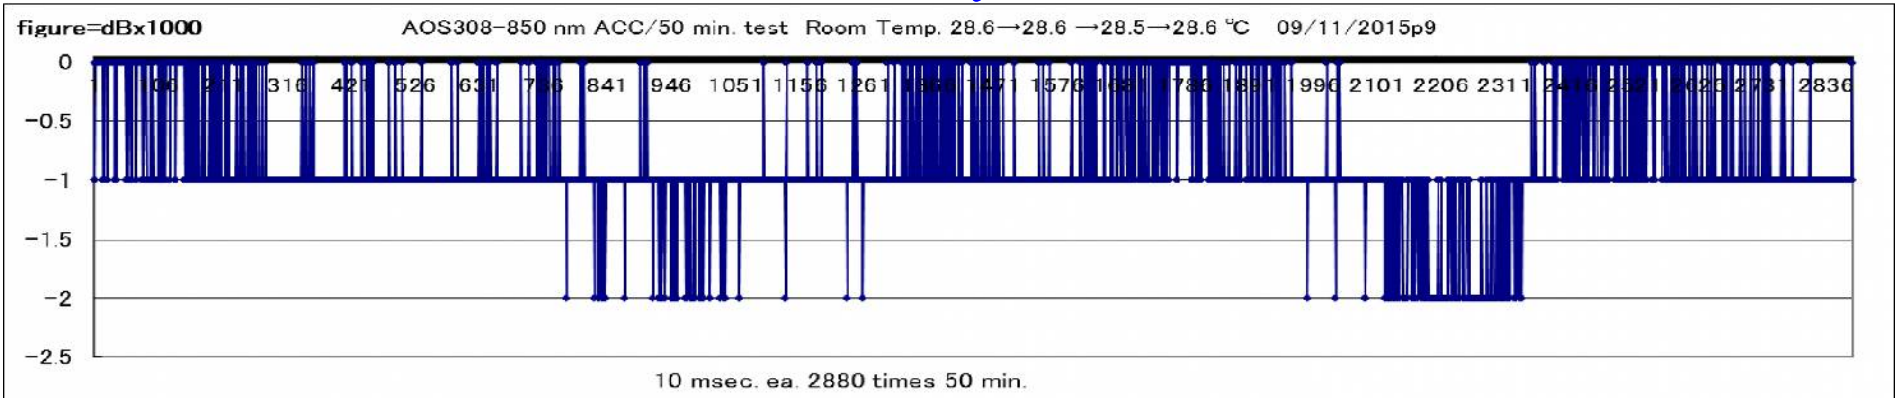


8 hours

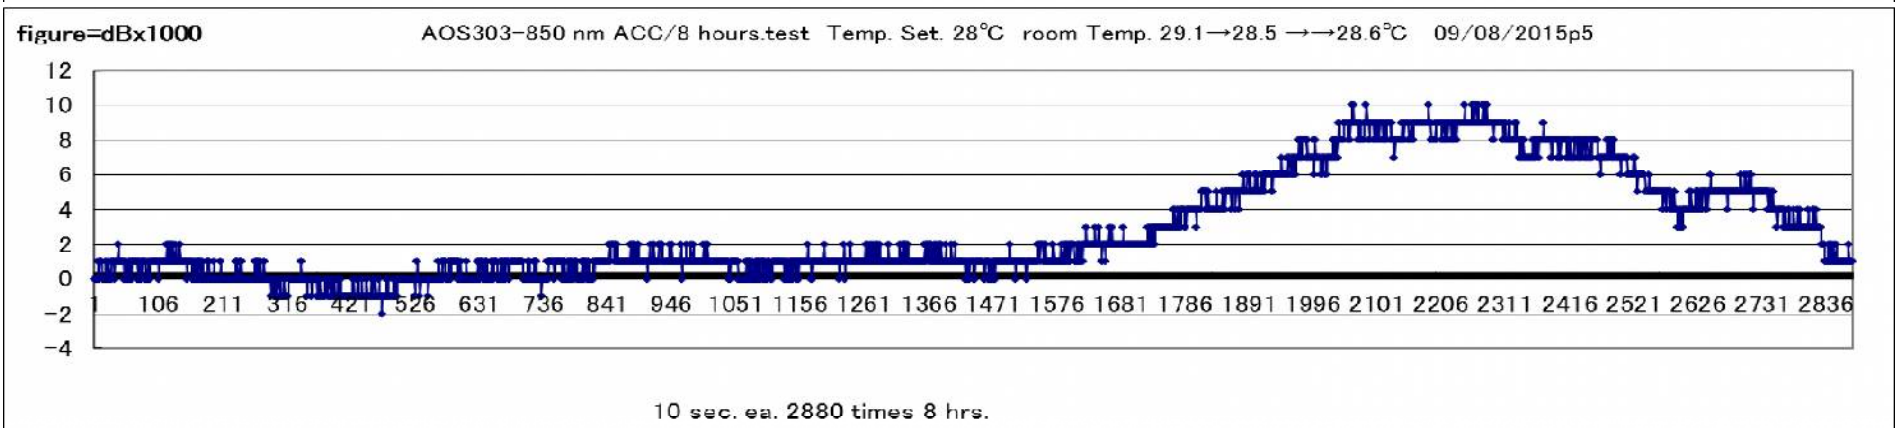

12hours

mW
indicate

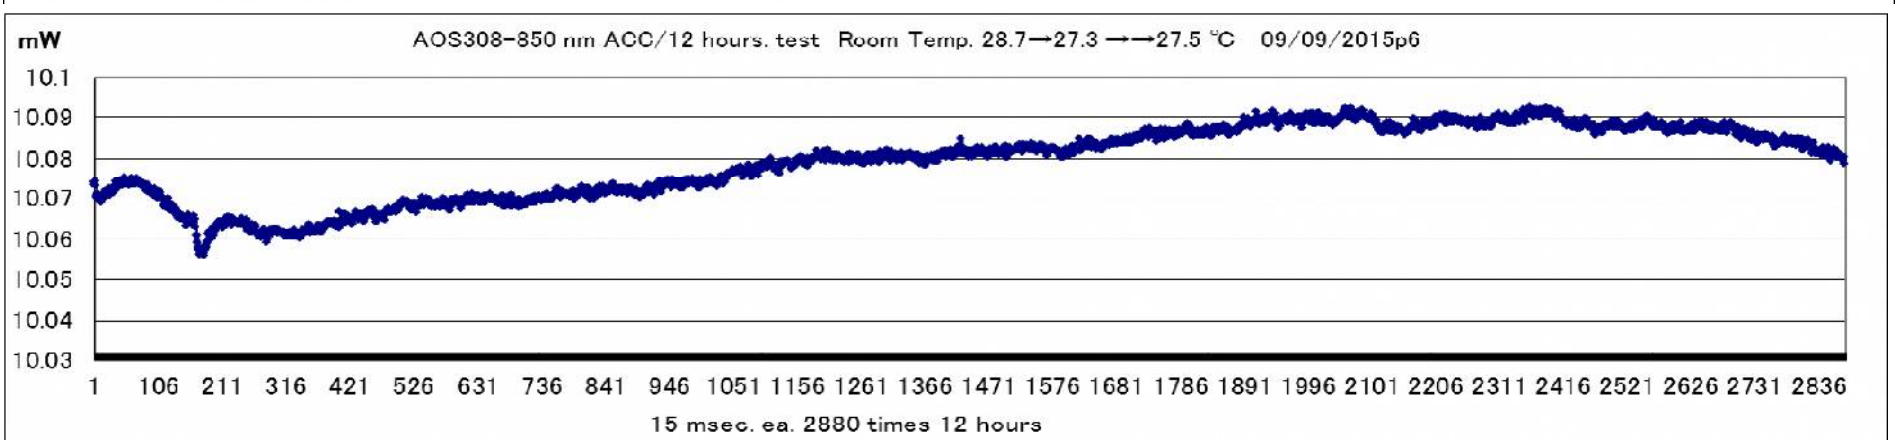

ORSA